

Proferred® VENDING SOLUTIONS

- 24/7 access to mission critical items
- Eliminate stock out's and excess inventory
- 20-30% Consumption reduction on average
- Simple web-based software that can be easily accessed via computer or tablet
- Ability to restrict or limit products by employee or department
- Automated usage and transaction reports
- Drives savings and increased productivity



C3 Coil



C5 Coil

| | Proferred® C3 Coil | Proferred® C5 Coil |
|-------------------------|---|---|
| Standard | Internal LED lighting | Internal LED lighting |
| Standard | 10.1" Touchscreen Display | 10.1" Touchscreen Display |
| Standard | Proximity Card Reader | Proximity Card Reader |
| Option: Barcode Reader | Additional Cost | Additional Cost |
| Cellular Services | Standard Cellular Connection via T-Mobile / Standard (no additional Cost) | Standard Cellular Connection via T-Mobile / Standard (no additional Cost) |
| # of Items | Up to 43 Items | Up to 60 Items |
| Electrical Requirements | USA: 115VAC / 60Hz, 1.2 AMPS. International: 230VAC / 50Hz, 0.6 AMPS | USA: 115VAC / 60Hz, 1.2 AMPS. International: 230VAC / 50Hz, 0.6 AMPS |
| Connections | LAN / WIFI / Cellular Connection | LAN / WIFI / Cellular Connection |
| Height | 72" (183 cm) | 72" (183 cm) |
| Width | 29.3" (74.4 cm) | 41" (104 cm) |
| Depth | 35.2" (89.4 cm) | 35.2" (89.4 cm) |
| Weight | 445 LB (202 KG) | 628 LB (284 KG) |




Adjustable Locker Host



Adjustable Locker Satellite

| | Proferred® Locker Host | Proferred® Locker Satellite |
|--|---|---|
| Standard | Internal LED lighting | Internal LED lighting |
| Standard | 10.1" Touchscreen Display | Connection via Host machine |
| Standard | Proximity Card Reader | NA |
| Option: Barcode Reader | Additional Cost | NA |
| Option: Powered Locker (Adjustable Locker) | Additional Cost | Additional Cost |
| Cellular Services | Standard Cellular Connection via T-Mobile / Standard (no additional Cost) | NA |
| # of Doors | 18 Doors Adjustable | 20 Doors Adjustable |
| Electrical Requirements | USA: 115VAC / 60Hz, 1.0 AMPS. International: 230VAC / 50Hz, 0.5 AMPS | USA: 115VAC / 60Hz, 1.0 AMPS. International: 230VAC / 50Hz, 0.5 AMPS |
| Connections | LAN / WIFI / Cellular Connection | Connection via Host machine |
| Height | 72" (183 cm) | 72" (183 cm) |
| Width | 30.25" (76 cm) | 30.25" (76 cm) |
| Depth | 24.5" (62cm) | 24.5" (62cm) |
| Weight | 357 LB (162 KG) | 357 LB (162 KG) |

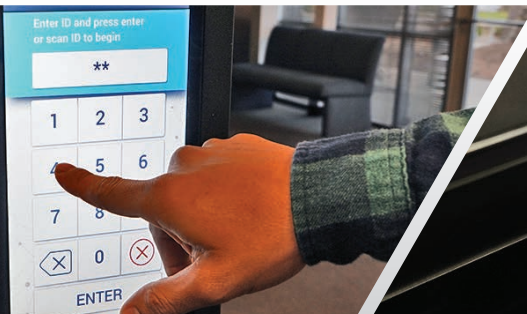

**BRIGHTON-BEST
INTERNATIONAL**

www.brightonBEST.com

1-800-275-0050



BBI products and services offered exclusively through distribution © Brighton-Best International, Inc.