




P R O D U C T D A T A S H E E T

USA/CA: brightonBEST.com Europe: brightonBEST.org AU: brightonBEST.com.au NZ: brightonBEST.co.nz Brazil: brightonBEST.com.br

Hexagon Socket Head Shoulder Bolts - Inch Series

1.0 Dimensions: ASME B18.3.

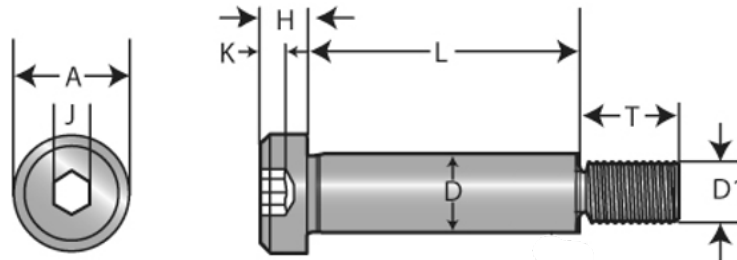

Nominal Size or Basic Shoulder Diameter	D		A		H		J	K	D1		T
	Shoulder Diameter		Head Diameter		Head Height		Key Size	Key Engagement	Thread Details		Thread Length
	Max	Min	Max	Min	Max	Min	Nom	Min	Thread Size	Threads per inch	Basic
1/4	0.2480	0.2460	0.375	0.357	0.188	0.177	1/8	0.094	10	24	0.375
5/16	0.3105	0.3085	0.438	0.419	0.219	0.209	5/32	0.117	1/4	20	0.438
3/8	0.3730	0.3710	0.562	0.543	0.250	0.240	3/16	0.141	5/16	18	0.500
1/2	0.4980	0.4960	0.750	0.729	0.312	0.302	1/4	0.188	3/8	16	0.625
5/8	0.6230	0.6210	0.875	0.853	0.375	0.365	5/16	0.234	1/2	13	0.750
3/4	0.7480	0.7460	1.000	0.977	0.500	0.490	3/8	0.281	5/8	11	0.875
1	0.9980	0.9960	1.312	1.287	0.625	0.610	1/2	0.375	3/4	10	1.000
1-1/4	1.2480	1.2460	1.750	1.723	0.750	0.735	5/8	0.469	7/8	9	1.125

Notes:

- D: Diameter of the shoulder. L: Length of the shoulder.
- Length of the shoulder (L) is only from under the head to the end of the shoulder. It does not include the thread length. Length (L) tolerance is + or - 0.005 for all lengths.
- Thread Length (T) tolerance will be - 0.020" for shoulder sizes up to 3/8 inch inclusive and - 0.030 "for shoulder sizes larger than 3/8 inch. The thread length (T) remains constant for a given shoulder diameter.



BRIGHTON-BEST INTERNATIONAL



P R O D U C T D A T A S H E E T

USA/CA: brightonBEST.com Europe: brightonBEST.org AU: brightonBEST.com.au NZ: brightonBEST.co.nz Brazil: brightonBEST.com.br

Hexagon Socket Head Shoulder Bolt - Inch Series

Notes Cont'd:

- d) Shoulder bolt is specified only by the diameter of the shoulder (D) and the length of the shoulder (L). Thread size will always be smaller than the shoulder diameter. Thread size may be specified in the description as an additional information. Examples of shoulder bolt descriptions: 5/8 X 2 1/2 shoulder bolt or 5/8 – (1/2 -13) X 2 1/2 shoulder bolt. Both specify the same shoulder bolt with shoulder diameter (D) of 5/8 “ and shoulder length (L) of 2- 1/2” and with a thread size of 1/2-13 (UNC). Sometimes thread size is not specified in the shoulder bolt descriptions.
- e) All shoulder bolts are provided with coarse threads only.
- f) Thread Class of Fit: 3A.

2.0 Mechanical Properties:

Steel: ASME B18.3. There is no separate standard for mechanical properties for shoulder bolts. Mechanical properties are also covered in the dimensional standard ASME B18.3. Hardness 32-43 HRC. Shoulder bolts, because of the product configuration, are not subjected to tensile testing. Hardness & Decarburization / Carburization are the only requisite mechanical properties to be met by the shoulder bolts.

Stainless Steel: ASME B18.3 does not specify stainless steel shoulder bolts. Mechanical properties of stainless steel shoulder bolts are as per manufacturer's standard only. Specification: Type: 18-8. Condition: CW1. Minimum hardness will be 59 HRA or 96 HRB.

The shoulder bolts will only have manufacturer's marking on the head.